


CAPRI HANDLESET




CAPRI
NICKEL SATIN
15 19

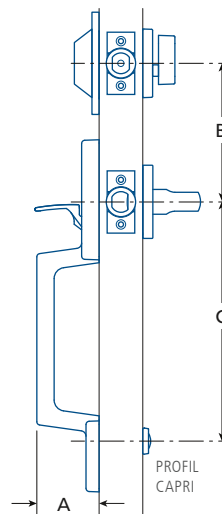

	A	B*	C
CAPRI CA	2 $\frac{5}{8}$ (55)	5 (127)	8 $\frac{13}{32}$ (214)

PO (MM) (*) RECOMMENDED DISTANCE

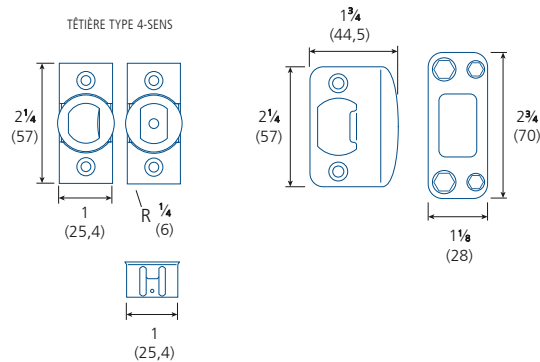

- Complies with ANSI/BHMA Grade 3
- 20-minute fire resistance when installed with fire stop kit*
- 25-year limited mechanical warranty
- 5-year limited finish warranty
- Handless, brass exterior trim
- Includes Cambridge interior lever
- For doors 1 $\frac{3}{8}$ –2 $\frac{1}{4}$ " (44.5–57 mm) thick
- Fits standard 2 $\frac{1}{8}$ " (54 mm) door preparation with 1" (25.4 mm) edge drilling
- Stainless steel tubular spring latch with adjustable spacing of 2 $\frac{3}{8}$ –2 $\frac{3}{4}$ " (60–70 mm)
- 1" (25.4 mm) brass deadbolt with hardened steel security pin and adjustable spacing from 2 $\frac{3}{8}$ –2 $\frac{3}{4}$ " (60–70 mm)
- 4-way mortise faceplate with square corners, convertible to "sink-in" type
- Galvanized steel interior mechanism
- Removable 5-pin brass cylinder in steel housing with 2 keys
- Solid strike plate and security strike plate with rounded corners for wooden door frames included

